


RX²

2-CH / 2U INGEST SERVER



Cinedeck's RX2 redesign features a rack mountable, slim 2U chassis that can record 2i/2o or 4in mode. Cinedeck's UI, Client 2.0 provides even greater flexibility for your production and can run independently as a controller, scheduler or multiviewer on any Mac or PC device, controlling one or more Cinedeck appliances.

Back Panel

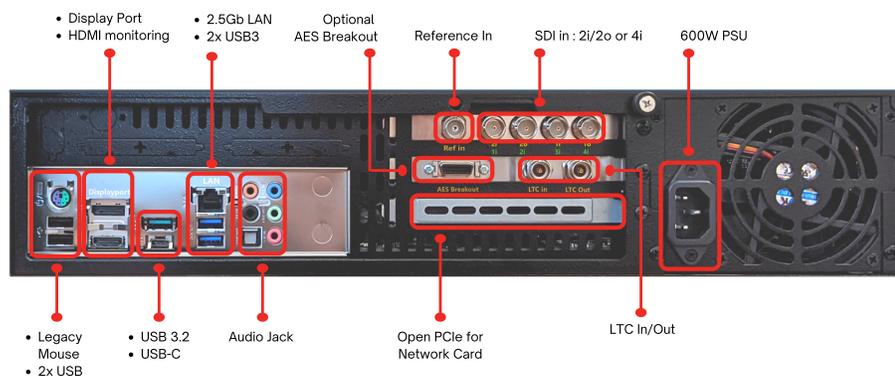

Features

- Full - featured RESTful API
- Edit While Capture
- Audio Mapping
- Avid Media Central support
- Character Overlay
- Closed Captions Support
- Playout while Record
- Scheduling with conflict checking
- Segment Record
- Flexible Storage Option
- Hi-res / Proxy Recording
- Redundant Recording

Hardware Specifications

10th Generation i-9
10 core CPU
Onboard GPU

Video Formats

1080i 25, 29.97, 30
1080PsF 23.98, 24, 25*, 29.97*
1080p 23.98, 24, 25, 29.97
720p 23.98*, 25*, 29.97*, 50, 59.94, 60

Codec Support

Pro Res, XDCAM, DNxHD, AVC-I,
DVCPRO HD, H.264, IMX (D10)

Video Input

3G HDSDI, NDI, SRT

Resolution Support

HD [1080i, 1080P/PSF, 720P]
SD [NTSC & PAL - I & P]

User Interface

PC and Mac application that runs independently of Cinedeck hardware.